




EAN code:
MB-1: 8595188193801

Technical parameters		MB-1
Interface Wireless Control		
Communication protocol:	RFIO3	
Broadcasting frequency:	866–922 MHz	
Signal transfer method:	two-way addressed message	
Communication interface:	WiFi	
Indications Wireless communications:	1x green RF LED	
Range:	in open space up to 100 m	
Power supply		
Supply voltage/current:	5 V DC/0.5 A	
Power source:	110–230 V AC/5 V DC–2 A (connector USB-C)	
Indication LED STATUS		
- green:	normal mode	
- red:	error condition	
- orange:	initialization/start	
Other data		
Operating temperature:	-20 to +50 °C	
Storage temperature:	-25 to +70 °C	
Protection:	IP20	
Contamination degree:	2	
Working position:	any	
Dimensions:	90 x 52 x 65 mm	
Weight:	25 g	
Standards:	EN 60730, EN 63044, EN 300 220, EN 301 489	

- The Mini Bridge MB-1 is a gateway between iNELS Home units, mobile app, iNELS Cloud and functionality provided by this services.
- It communicates from up to 10 iNELS Home units, processes set programs for automatic control.
- Thanks to two-way communication, it displays the current status of individual elements.
- Powered by 5 V DC/2 A adapter, USB-C connector (included).
- Configuration is done via the iNELS Home app.
- WiFi pro připojení do lokální sítě
- Relé 10A / 2000 VA pro přímé ovládání v aplikaci

Device description

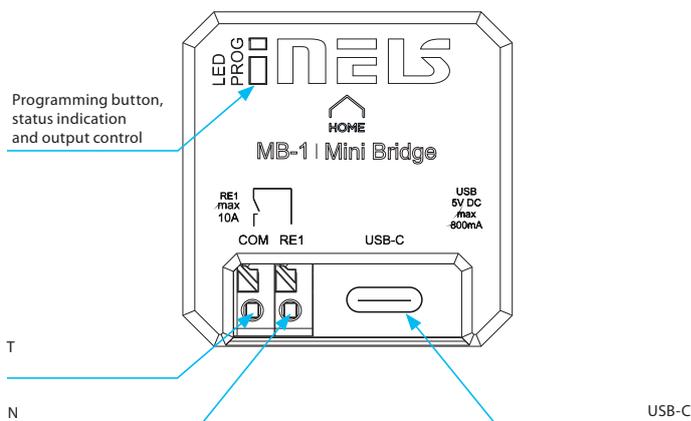

Connection

